



FIBER SYSTEM SPLICE CLOSURE

Focusing on FTTX equipment manufacturing



ZCSC-S048-01

Max Capacity	48F
Material	PP/PC
Max Splice Trays	4*12F
Dimension (mm)	300*Φ118

Inlets/Outlets	2/2
Accessible Cable Diameter	Round:Φ16mm
Protection Rate	IP68
Cable Port Sealing	Screw Mechanical



ZCSC-S048-02


Max Capacity	48F
Material	PP
Max Splice Trays	2*24F
Dimension (mm)	400*Φ260

Inlets/Outlets	2/4
Type of PLC	1:16 Micro PLC
Protection Rate	IP68
Cable Port Sealing	Screw Mechanical/Heat Shrinkable

1:16 Micro PLC is available along with 18 pcs SC adaptors.



- 1 Φ8 ~ 18mm uncut cable.
- 2 Φ8 ~ 18mm cut cable.

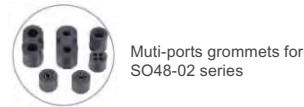

Multi-ports grommets for SO48-02 series

ZCSC-S096-01

Max Capacity	96F
Material	PP/PC
Max Splice Trays	4*24F
Dimension (mm)	410*Φ135

Inlets/Outlets	1/3
Accessible Cable Diameter	Oval:Φ26mm;Round:Φ21mm
Protection Rate	IP68
Cable Port Sealing	Heat Shrinkable





ZCSC-S120-01

Max Capacity	120F	Inlets/Outlets	1/4
Material	PP	Type of PLC	1*1:32/2*1:16 Micro PLC
Max Splice Trays	5*24F	Protection Rate	IP68
Dimension (mm)	480*Φ260	Cable Port Sealing	Screw Mechanical/Heat Shrinkable



ZCSC-D144-03

Model No	Max Capacity	Max Splice Trays	Dimension (mm)	Inlets/Outlets
ZCSC-D144-03	Bundle cable: 144F	4*36F	525*Φ225	1/6
	Ribbon cable: 432F	6*72F		Protection Rate
Material	PP	Cable Port Sealing	Heat Shrinkable	IP68



ZCSC-D240-01


Model No	Max Capacity	Max Splice Trays	Dimension (mm)	Inlets/Outlets
ZCSC-D240-01	Bundle cable: 240F	10*24F	480*Φ260	1/6
	Ribbon cable: 720F	10*72F		Protection Rate
Material	PP	Cable Port Sealing	Heat Shrinkable	IP68





ZCSC-D360-01

Model No	Max capacity	Max splice trays	Material	Dimension (mm)	Protection Level	Type of PLC
ZCSC-D144-05	144F	12*12F/24*6F	PP	400*Φ270	IP68	2*1:4/1*1:8 Micro PLC
ZCSC-D360-01	360F	30*12F/60*6F		500*Φ270		
ZCSC-D672-01	672F	56*12F		625*Φ270		

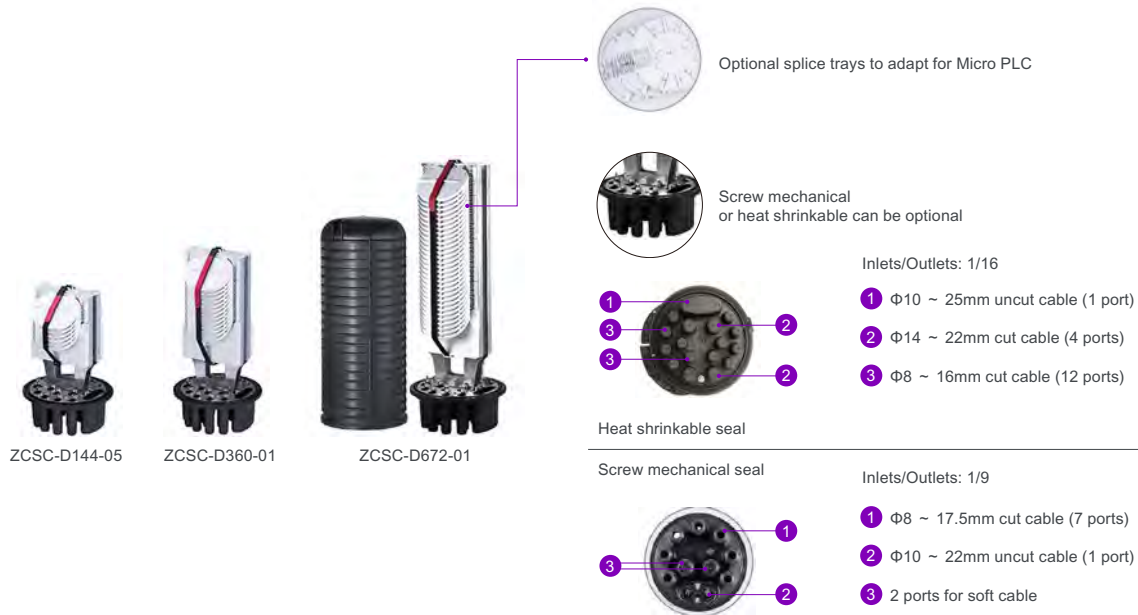

ZCSC-D480-01

Model No	Max capacity	Max splice trays	Material	Dimension (mm)	Protection Level
ZCSC-D408-01	408F	34*12F	PP	480*Φ270	IP68
ZCSC-D480-01	480F	40*12F		500*Φ270	
ZCSC-D576-01	576F	48*12F		600*Φ270	





INLINE OPTIC SPLICE CLOSURE



ZCSC-H024-02

Max Capacity	24F	Inlets/Outlets	2/2
Material	PP/PC	Accessible Cable Diameter	Round: Φ 7-12mm
Max Splice Trays	1*24F	Protection Rate	IP68
Dimension L*W*H(mm)	248*156*30	Cable Port Sealing	Screw Mechanical



ZCSC-H036-01

Max Capacity	36F	Inlets/Outlets	2/2
Material	PP	Accessible Cable Diameter	Oval: Φ 10-17.5mm
Max Splice Trays	3*12F	Protection Rate	IP68
Dimension L*W*H(mm)	295*220*90	Cable Port Sealing	Screw Mechanical



Tighten mechanical seal

Tighten mechanical seal

ZCSC-H048-01

Max Capacity	48F	Inlets/Outlets	1/1
Material	PP/PC	Accessible Cable Diameter	Round: Φ 14-19mm
Max Splice Trays	2*24F	Protection Rate	IP68
Dimension L*W*H(mm)	255*165*90	Cable Port Sealing	Screw Mechanical



ZCSC-H048-04

Max Capacity	48F	Inlets/Outlets	2/2
Material	PP/PC	Accessible Cable Diameter	Round: Φ 7-14mm
Max Splice Trays	4*12F	Protection Rate	IP68
Dimension L*W*H(mm)	406*170*75	Cable Port Sealing	Screw Mechanical





ZCSC-H120-01

Max Capacity	120F	Inlets/Outlets	3/3
Material	PC/ABS	Accessible Cable Diameter	Round: $\Phi 9.6$, $\Phi 12.3$, $\Phi 14.6$ mm
Max Splice Trays	5*24F	Protection Rate	IP68
Dimension L*W*H(mm)	369*186*146	Cable Port Sealing	Screw Mechanical



ZCSC-H072-01/H144-05

Model No	Max Capacity	Max Splice Trays	Dimension L*W*H(mm)	Inlets/Outlets
ZCSC-H072-01	Bundle cable: 72F	3*24F	490*200*120	2/2
ZCSC-H144-05A	Bundle cable: 144F	6*24F	520*220*150	
ZCSC-H144-05B	Ribbon cable: 432F	6*72F		
Material	PP	Accessible Cable Diameter	Round: $\Phi 10$ -18mm	
Cable Port Sealing	Screw Mechanical	Protection Rate	IP68	



ZCSC-H144-07/H288-02

Model No	Max Capacity	Max Splice Trays	Dimension L*W*H(mm)	Inlets/Outlets
ZCSC-H144-07	144F	6*24F	515*217*120	3/3
ZCSC-H288-02	288F	6*48F	515*217*150	
Material	PP	Accessible Cable Diameter	Round: $\Phi 10$ -20mm	
Cable Port Sealing	Screw Mechanical	Protection Rate	IP68	

